



MATERIALS HANDLING | Stackers and Lifters

Winch Stacker

- ▲ Compact and service free design.
- ▲ Unique design of winch for easier and safer lifting.
- ▲ Heavy duty "C" section mast.
- ▲ Adjustable fork width from 160mm to 690mm (WS25, WS50).
- ▲ Two parking brakes on steering wheels.




Article No.		WS25	WS50	WS100
Capacity	(kg)	250	500	1000
Load Centre	(mm)	400	500	575
Max. Fork Height	(mm)	1560	1560	1500
Lowered Fork Height	(mm)	90	90	88
Fork Adjustable Width	(mm)	150-690	160-690	540 Fixed
Fork Length	(mm)	800	1000	1150
Fork Width	(mm)	60	70	160
Effort Force to Rated Load	(N)	100	120	100
Lifting Height per Stroke	(mm)	40	22	9.5
Ground Clearance	(mm)	18	18	24
Min. Turning Radius (outside)	(mm)	1075	1075	1250
Front Load Roller	(mm)	Ø80x47	Ø80x47	Ø80x94
Steering Wheel	(mm)	Ø150x40	Ø150x40	Ø150x50
Overall Size (LxWxH)	(mm)	1325x725x2030	1325x725x2030	1600x725x1930
Net Weight	(kg)	140	146	182



Hydraulic Manual Stacker

- ▲ Latest technology in hydraulic pump requiring less operating force. Top quality German seal kit.
- ▲ Heavy duty 1 piece "C" section forks for greatest strength.
- ▲ Optional adjustable forks for wider applications.
- ▲ Economic and reliable.

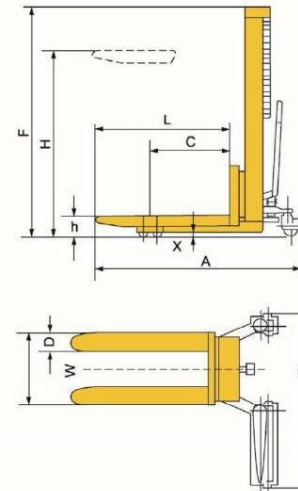

Hydraulic Stacker

- ▲ Designed for heavy-duty, intensive and commercial use;
- ▲ Ergonomically designed handle for simple and comfortable operation;
- ▲ Single mast without view-obstructing components;
- ▲ Easy to operate with quick-lift function;
- ▲ Forced synchronous steering on two steering wheels;
- ▲ Quick lifting type is available.



Article No.		SU1017
Capacity	(kg)	1000
Max. Fork Height	(mm)	1700
Min. Fork Height	(mm)	88
Fork Length	(mm)	1150
Fork Width	(mm)	540
Net Weight	(kg)	245
Wheel Type		polyurethane
Oversize	(mm)	1615x685x2130

Article No.		PA0515	PA1015	PA1025	PA1515	PA2015
Capacity	(kg)	500	1000	1000	1500	2000
Load Centre	C (mm)			585		
Max. Fork Height	H (mm)	1500	1500	2500	1500	1500
Min. Fork Height	h (mm)			88		
Fork Length	L (mm)			1150		
Fork Width	D (mm)			160		
Overall Fork Width	W (mm)			540		
Lifting Height Per Stroke	(mm)	20	12.5	12.5	12.5	10
Ground Clearance	X (mm)			24		
Min. turning Radius (outside)	(mm)	1086	1086	1086	1100	1100
Front Load Roller	(mm)			Φ80×70		
Steering Wheel	(mm)	Φ150×40	Φ150×50	Φ150×50	Φ180×50	Φ180×50
Overall Length	A (mm)	1604	1604	1646	1665	1695
Overall Width	B (mm)	794	760	760	720	720
Overall Height	F (mm)	2010	2010	1890	2010	2010
Net Weight	(kg)	210	220	330	250	280

Option adjustable fork available: 346-710mm fork width.
 Note: Materials and specification are subject to change without notice.